

Fabrication of Metallic (SN)(x) Films

Author(s): **IBM TDB**

Beyer, W

Gill, WD

Grant, PM

Mengel, P

IP.com number: **IPCOM000088717D**

Original Publication Date: **July 1, 1977**

Original Disclosure Information: **TDB 07-77 p754-755**

IP.com Electronic Publication: **March 4, 2005**

IP.com, Inc. is the world's leader in defensive publications. The largest and most innovative companies publish their technical disclosures into the IP.com Prior Art Database. Disclosures can be published in any language, and they are searchable in those languages online. Unique identifiers indicate documents containing chemical structures as well as publications open for comment in the IP Discussion Forum. Disclosures are published every day online and also appear in the printed IP.com Journal. The IP.com Prior Art Database is freely available to search by patent examiners throughout the world.


Client may copy any content obtained through the site for Client's individual, noncommercial internal use only. Client agrees not to otherwise copy, change, upload, transmit, sell, publish, commercially exploit, modify, create derivative works or distribute any content available through the site.

Note: This is a pdf rendering of the actual disclosure. To access the notarized disclosure package containing an exact copy of the publication in its original format as well as any attached files, please download the full document from the IP.com Prior Art Database at: <http://www.ip.com/pubview/IPCOM000088717D>

Fabrication of Metallic (SN)(x) Films

A metallic (SN)(x) film having increased conductivity is fabricated with the system shown in the drawing. In contrast to all previously fabricated films of (SN)(x), these films exhibit a metallic temperature dependence of the conductivity, i.e., the conductivity increases monotonically with decreasing temperature.

In an evacuated chamber having a pressure of 10^{-5} to 10^{-6} torr, S(4)N(4) powder 10 is heated in a quartz vessel 12 to a temperature of 80-100 degrees C. The S(4)N(4) vapor that is formed rises and passes through silver wool 14 which has a temperature of 250-300 degrees C. The resultant vapor leaves the end 16 of the quartz vessel 12 and forms a metallic film (not shown) on the substrate 18 which is maintained at a critical temperature of 40-60 degrees C. The distance between the end 16 of the vessel 12 and the substrate 18 is critical and must be less than 5 mm.

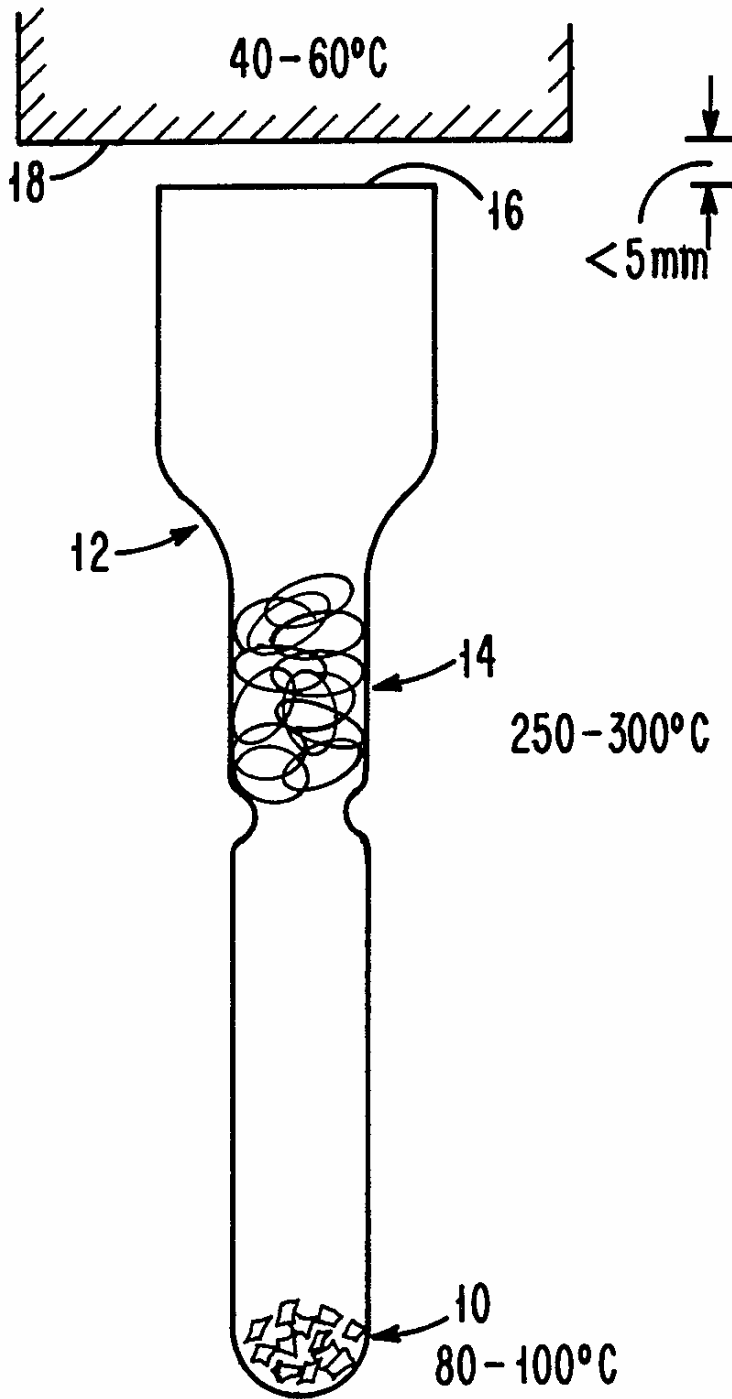

(SN)
shown^x